

HEADLAMP MAIN BEAM (56A)
AMPOULE PLEIN PHARE
SCHEINWERFER-AUFBLENDLICHT
LUCE ABBAGLIANTE FARO
FAROS DE LUZ LARGA
HOVEDLYS

FRONT/SIDE LAMP (58)
FEU AVANT/LATERAL
FRONT/SEITENLICHT
FANALE ANTERIORE/LATERALE
FAROS DE LUCAS DE POSICION
SIDELYKT FORAN

RING
Navigator
Dual voltage driving lamp

Fitting Instructions


RL029, RL037, RL039, RL049, RL057, RL059, RL069

IMPORTANT

Before fitting the driving lamps please ensure that the vehicle is parked safely off the road, engage the handbrake and remove the correct fuse/s from the circuit. Please make sure that you read the fitting instructions carefully before fitting the lamps and consult a qualified auto electrician if in any doubt.

Warning: disconnecting the battery may disable management systems.

Tools required



USEFUL ACCESSORIES:



For 12v vehicles a full fitting kit including dual switch for operating sidelight option is available part number RLFK400.



Distributed by:
Ring Automotive Gelderd Road, Leeds LS12 6NB England
Tel: +44 (0)113 276 7676 Fax: +44 (0)113 231 0266
Email: autosales@ring.ltd.uk


L235

Bulbs

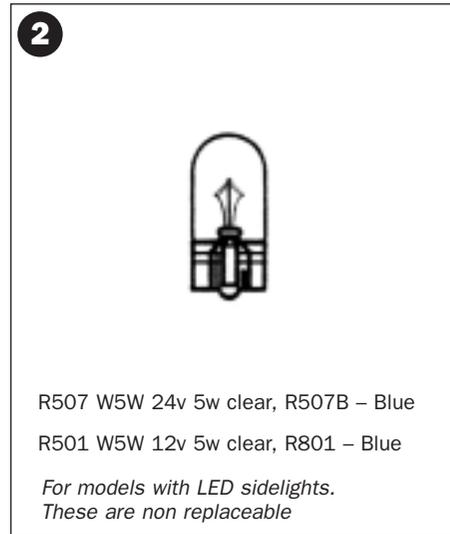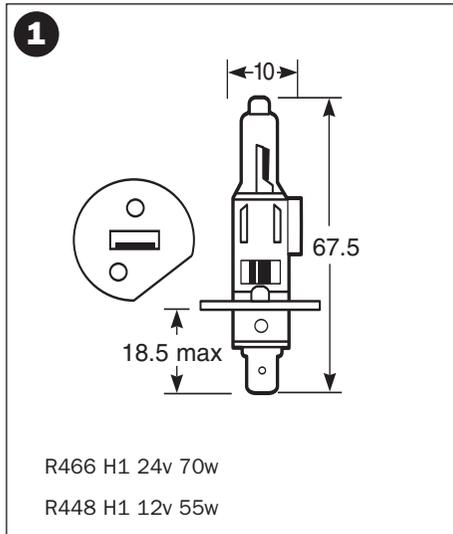

IMPORTANT: Handle halogen bulb by base only.
If glass is touched by mistake clean with a soft cloth and methylated spirit.

Fitting the bulbs


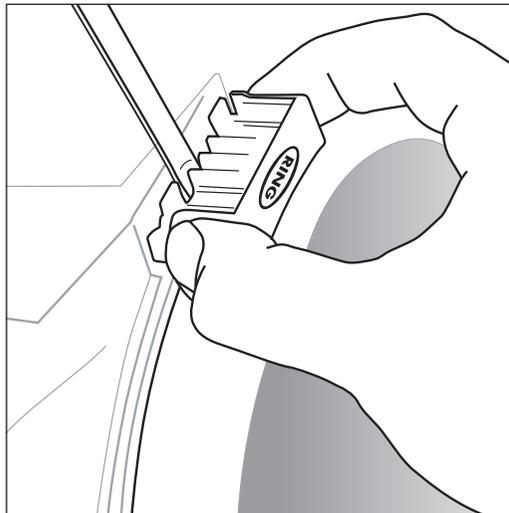


- Place thumb and forefinger over plastic section at the base of the bezel and gently exert pressure (see diagram). At the same time insert a screw driver in between the gap that this forms and carefully prise the front section off.
- Using a Philips screwdriver remove the 4 screws on the lens section and separate the housing from the headlamp unit.
- To insert the headlamp bulb connect it to the red wire and insert into the back of the lens unit. Replace the metal clip so that the headlamp is secured into place.
- Insert the side light bulb into the plastic bulb holder connected to the brown and black wire.
- Replace the headlamp unit back into the housing and replace the screws.
- Clip the front rim back into position.



5w sidelight options only

Fitting the bracket

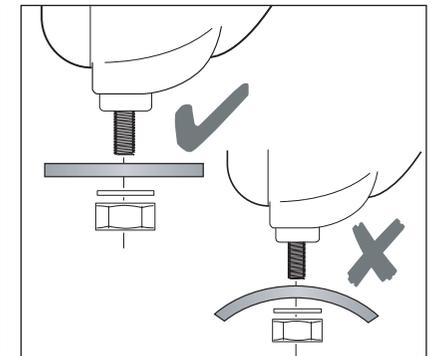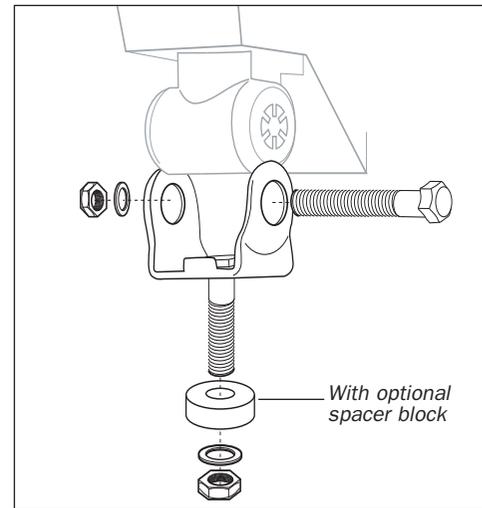

Do not fit to a curved surface


UK REQUIREMENTS ONLY
LEGAL REQUIREMENTS
OTHER COUNTRIES CONSULT LOCAL REGULATIONS

When fitting a pair of driving lamps you should obey the following legal requirements:

Driving lamps should be positioned symmetrically; the same height from the road and the same distance from the sides of the vehicle.

Driving lamps can only be used with main beam and should be extinguished when headlights are dipped.

There are no height requirements for the positioning of driving lamps, but you should not DAZZLE any other road user.

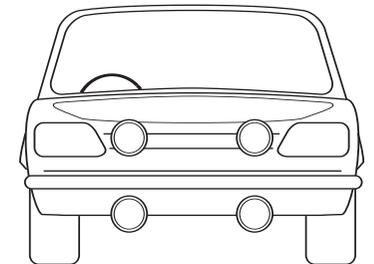

THE ROAD VEHICLES LIGHTING REGULATIONS 1989